


고장력 볼트 세트 (F10T,S10T) 사용시 주의사항!


Installation of High Strength Bolts Set (F10T,S10T)

체결 시 유의사항 (Attention in Fastening)

A. 고장력(High Strength Bolt) 육각볼트(F10T)

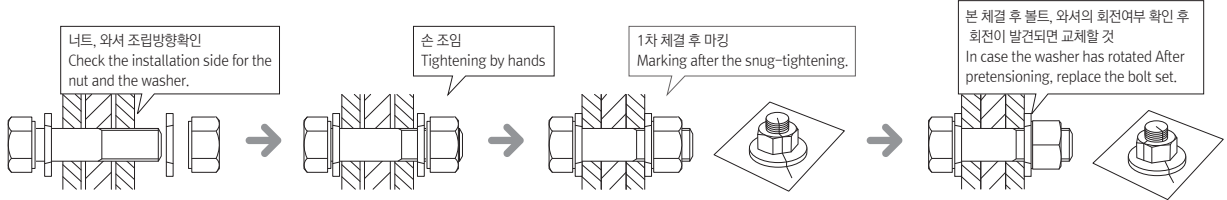

B. 둥근머리 고장력(Torque Shear Bolt) 볼트(S10T)

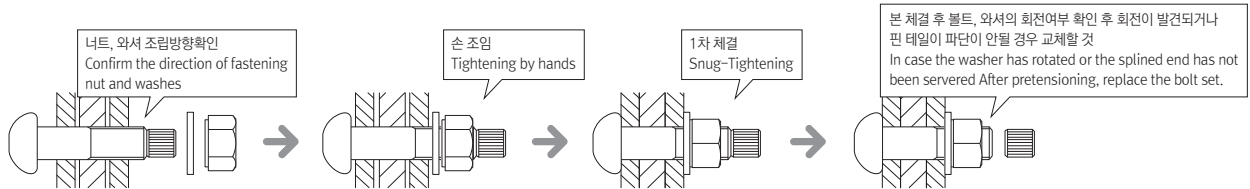

- ▶ 1차 조임 전 부재간의 홀 센터가 일치된 상태에서 볼트를 홀에 삽입 하십시오.(볼트 강제 박음 시공을 절대 하지 마십시오)
(All boltholes shall be aligned to permit insertion of the bolts without undue damage to the threads before snug-tightening. (Do not hammer bolt head to insert the bolt in to the holes.))
- ▶ 1차 체결 후 눈 또는 비가 내릴 경우 1차 체결에 한하여 본 체결 (마지막 체결 필히 완료할 것)
(In case it rains or snows after the snug-tightening, pretensioning must be done with the Bolts which are snug-tightened.)
- ▶ 본 체결시 소켓의 마모상태를 확인하고 정확히 삽입 후 체결할 것. 마모 소켓 사용시 문제가 발생할 수 있음.(둥근머리 고장력볼트)
(Do fastening after exact adjusting and confirmation the condition of wear of inner socket. Use of bad socket may happen problem. (Torque Shear Bolt Sets))

보관 시 유의사항 (Attention in Storage)

본 제품 표면 윤활조건을 변경시키는 비, 눈, 습기, 오물, 모래바람, 직사광선등과 직접 접촉되지 않도록 통풍이 잘되는 창고 및 유사한 위치에 보관, 관리할 것.

(Please, Pay attention on following instruction Rain, Snow, Moisture, Foreign substance, Sand wind, direct sunlight can cause bad impact on bolt proper function. Product lubricating condition could be changed by the about cause. Keep the bolt in good ventilation warehouse or similar place.)

